

TRB140

LTE GATEWAY BOARD

Industrial LTE Cat 4 Gateway Board TRB140 is equipped with a single Ethernet port, Digital Inputs/Outputs and a micro-USB port. TRB140 compact design makes this Gateway perfect for an application where a sole gadget must be granted reliable Internet connectivity. TRB140 is engineered to be used in Industrial applications, therefore, it has a wide range of software features such as SMS control, Firewall, OpenVPN, IPsec, RMS and FOTA support.



EFFICIENT

Easy Integration

Compact size

Low Power consumption

ADVANCED

LTE Cat 4
High Performance
Open platform with SDK


SECURE

OpenVPN and IPsec Embedded Firewall

Encrypted management with Remote Management System



Hardware

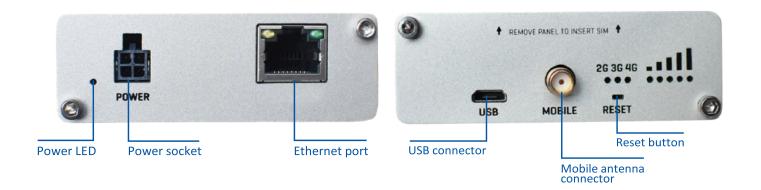

Mobile	LTE (Cat4)/3G/2G
SIM slot	Mini SIM (2FF)
Antenna connector	1 x SMA for LTE
Ethernet	1 x 10/100/1000 Mbps
Input/Output	2 x Digital Input/Output (configurable)
CPU	ARM Cortex-A7 1.2 GHz CPU
RAM	128 MB (50 MB available for userspace)
Flash	512 MB (200 MB available for userspace)
Input voltage range	9 - 30 VDC
Power connector	4 pin industrial DC power socket
PoE (passive)	Passive PoE over spare pairs. Possibility to power up through LAN port, not compatible with IEEE802.3af and 802.3at standards

irtual NIC via Micro-USB connector
ower, signal, network and data status LEDs
40° C to 75° C
0 mm x 70 mm x 18 mm
34 g
0

Software

Operating system	RutOS (OpenLinux based Linux OS)
Network	NAT, Firewall (port forward, traffic rules, custom rules), DDNS (>25 service providers supported)
Remote management	RMS Support, FOTA support, SSH, CLI, SMS Utilities (status/configuration)
Status watchdogs	Ping reboot, periodic reboot
Additional features	Internet connectivity over USB virtual network interface

For More Information, please contact

AUTOMATION SYSTEMS & SOULTION

T - 12, 3rd Floor, Pankaj Central Market, I. P. Extn., Patparganj, Delhi - 110092

Phone: +91 11 41709077 / 22232187 **E - Mail**: infoautomation18@gmail. com