



TRB142

RS232 LTE GATEWAY BOARD

Industrial LTE Cat 1 Gateway Board TRB142 is equipped with an RS232 Interface, Digital Inputs/Outputs and a microUSB port. TRB142 compact design makes this Gateway perfect for an application where a sole gadget must be remotely controlled over the RS232 Interface. TRB142 is engineered to be used in Industrial applications, therefore, it has a wide range of software features such as SMS control, Firewall, OpenVPN, IPsec, RMS and FOTA support.



RS232 is an Industrial standard for serial communication



LTE Cat 1 for M2M/IoT communications



Compact size, easy integration



9-30V

Wide range of power supply voltages



Teltonika Remote Management System compatible



Easy to use, secure and feature rich OpenWrt based Operating System

EFFICIENT

Easy Integration
Compact size
Low Power consumption

ADVANCED



LTE Cat 1 for M2M via RS232
High Performance
Open platform with SDK

SECURE

OpenVPN and IPsec
Embedded Firewall
Encrypted management with Remote Management System

Hardware

Mobile	LTE (Cat1)/3G/2G
SIM slot	Mini SIM (2FF)
Antenna connector	1 x SMA for LTE
RS232	DB9 socket, 5 pin configuration with flow control, baud rate 300 - 115200
Input/Output	2 x Digital/Analog Inputs/Outputs (configurable)
CPU	ARM Cortex-A7 1.2 GHz CPU
RAM	128 MB (50 MB available for userspace)
Flash	512 MB (200 MB available for userspace)
Input voltage range	9 - 30 VDC
Power connector	4 pin industrial DC power socket
Configuration interface	Virtual NIC via Micro-USB connector
LED Indicators	Power, signal, network and data status LEDs
Operating temperature	-40° C to 75° C
Dimensions	60 mm x 70 mm x 18 mm
Weight	135 g

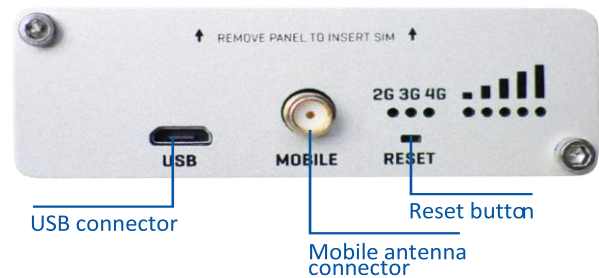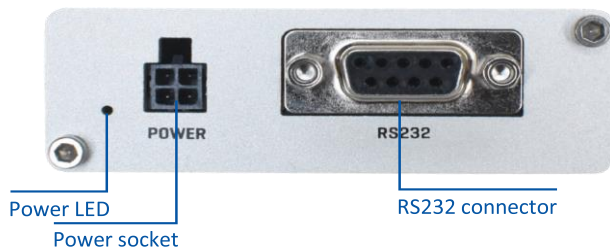

Software

Operating system	RutOS (OpenLinux based Linux OS)
Network	NAT, Firewall (port forward, traffic rules, custom rules), DDNS (>25 service providers supported)
RS232 related services	Modbus, Serial over IP, NTRIP
Remote management	RMS Support, FOTA support, SSH, CLI, SMS Utilities (status/configuration)
Status watchdogs	Ping reboot, periodic reboot
Additional features	Internet connectivity over USB virtual network interface

For More Information, please contact

AUTOMATION SYSTEMS & SOULTION

T - 12, 3rd Floor, Pankaj Central Market, I. P. Extn., Patparganj, Delhi - 110092

Phone: +91 11 41709077 / 22232187

E - Mail: infoautomation18@gmail. com